


# S1500-P CCTV Series

## Overview

BDCOM S1500-P CCTV Series is a multi-functional unmanaged full-gigabit PoE switch with large buffer capacity. The product is primarily applied in access layer of CCTV and WLAN. BDCOM S1500-P CCTV Series PoE switches include two models: S1500-16P2G2S, S1500-24P2G2S, catering to the needs of different-scale deployments in multiple industries such as finance, education, hospitality, healthcare, transportation, energy and manufacturing, empowering the establishment of simplified and secured network.

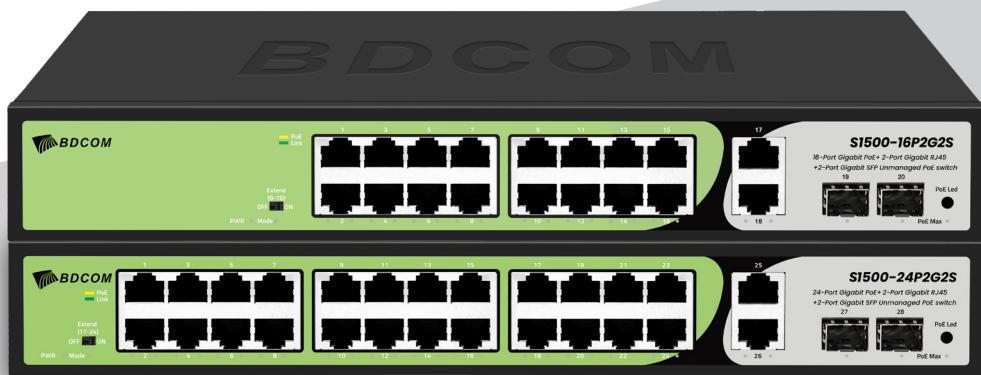

## CCTV-Mate

### Highlights

#### Switching Features

- Non-blocking switching architecture, and line-speed forwarding of all ports
- Large buffer design, ensures smooth playback of high-definition videos
- Supports IEEE802.3x full-duplex flow control and Backpressure half-duplex flow control
- Multi-functional DIP modes to meet various networking requirements

#### Practicability

- Plug and play
- LED indicators to show working status

#### PoE Features

- Compliant with IEEE802.3af/at standards, with a maximum PoE power of 30W per port
- High-power PoE power supply, supporting full load 802.3af on all ports
- Intelligent standard 48V PoE, negotiating power supply based on terminal type
- Supports short-circuit protection and overcurrent protection

#### Reliability

- Integrated professional lightning protection circuit, with high-level lightning protection
- Built-in high-quality PoE power supply, ensuring safe and stable PoE output
- Compliant with CE and FCC safety standards

## Model

### S1500-16P2G2S



- 16-Port Gigabit PoE+ 2-Port Gigabit RJ45 + 2-Port Gigabit SFP
- Built-in AC power supply
- DIP mode:
  - OFF: Standard operating mode
  - ON: 9 to 16 port extension with watchdog
- Dimensions (WxDxH): 320x207x45mm

### S1500-24P2G2S



- 24-Port Gigabit PoE+ 2-Port Gigabit RJ45 + 2-Port Gigabit SFP
- Built-in AC power supply
- DIP mode:
  - OFF: Standard operating mode
  - ON: 17 to 24 port extension with watchdog
- Dimensions (WxDxH): 320x207x45mm

## Specifications

Item	S1500-16P2G2S	S1500-24P2G2S
<b>Switching capacity</b>	40Gbps	56Gbps
<b>MAC</b>	2K	2K
<b>Buffer size</b>	4Mb	4Mb
<b>PoE Port</b>	16 Gigabit	24 Gigabit
<b>Uplink RJ45</b>	2 Gigabit	2 Gigabit
<b>Uplink SFP</b>	2 Gigabit	2 Gigabit
<b>Dimensions (mm)</b>	320x207x45	320x207x45
<b>PoE budget</b>	≤185W	≤285W
<b>PoE standard</b>	802.3af/at, maximum output of 30W per port	
<b>Power supply</b>	Built-in AC: 100~240V, 50/60Hz	
<b>Working mode</b>	Default mode, CCTV mode (supports watchdog)	
<b>Environment requirements</b>	Operating temperature/humidity: -10°C~45°C, 10%~90% non-condensing Storage temperature/humidity: -40°C~70°C, 5%~95% non-condensing	
<b>Fan</b>	Fanless	
<b>Lightning protection</b>	4KV	

## Ordering Information

S1500-16P2G2S	16-Port Gigabit PoE+ 2-Port Gigabit uplink RJ45 + 2-Port Gigabit uplink SFP Unmanaged PoE Switch, DIP function, built-in AC220V power supply; PoE budget 185W, desktop/rack-mounted installation
S1500-24P2G2S	24-Port Gigabit PoE+ 2-Port Gigabit uplink RJ45 + 2-Port Gigabit uplink SFP Unmanaged PoE Switch, DIP function, built-in AC220V power supply; PoE budget 285W, desktop/rack-mounted installation

Copyright © Shanghai Baud Data Communication Co., LTD.2024. All Rights Reserved.

This document is BDCOM Public Information. BDCOM reserves the right to alter, update and otherwise change the information contained in the document from time to time.

